

**The TR100 Palm Tree  
Ring for AXIS-TIC**

**Multiple diameter options  
Adjustable  
1 to 6 Fixtures  
Kit includes Power Supply**

**Multiple Beam  
Spread Options**

**Low Voltage or  
120-277VAC with kit**


**ETL Listed Wet  
Location**

**61 Month Warranty**



**COMPATIBLE PRODUCTS**

**Axis-TIC  
Axis-TIC Shroud**

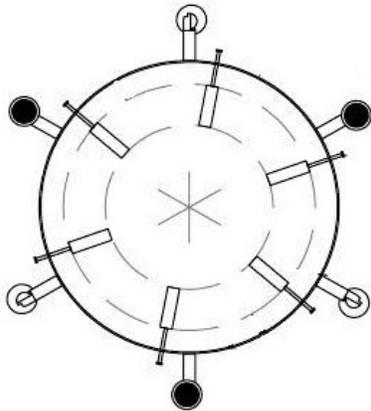

### Specifications

Light Source	High-brightness LED (520 lumens @ 3000k)
LED Life (L70)	50,000 hours average*
Input Voltage	11 - 15 VDC OR 120-277VAC with kit
Power Consumption	10 Watts
Color Temperature	2700k, 3000k, 3500k or 4000k
CRI	90 Typical
Optic	Interchangable TIR Lens
Material	6061-T6 Aluminum
Fasteners	Stainless steel hardware
Standard Mounting	PVC Post and ABS Cap
Operating Temperature	-31F to 122F (-35C to 50C)
Listings	ETL listed to UL Standards 1838 and 8750 CSA C22.2 No. 250.7-07



\*LED life is defined as the time to 70% lumen maintenance (L70)

### Ordering Guide

The TR-100 may be ordered as:

- 1) Ring only
- 2) Ring Plus Fixtures
- 3) As a Kit (includes power supply)

**NOTE:**

**ORDER TREE RING DIAMETER 7" TO 11" LARGER THAN AVERAGE TREE DIAMETER  
IF UNKNOWN MARK "XX" FOR DIAMETER UNTIL VERIFIED**

	RING DIAM	NUMBER OF FIXTURES	FINISH	OPTIC	COLOR TEMP	KIT	POWER SUPPLY
TR100							
	18" 24" 30" 36" CUSTIOM	0 (RING ONLY) 1 2 3 4 5 6	BRONZE BLACK WHITE OTHER (RAL) NATURAL	SPOT MEDIUM WIDE	2700K 3000K 3500K 4000K	YES NO	NON DIM 0-10V DIM OTHER DIM

\*For LED array replacement please order by kelvin temperature. Example: [Axis-TIC array-3000k](#)