




FOR CONCRETE OR MASONRY INSTALLATIONS

SL200 APPLICATIONS

**STEP LIGHTING - PATH LIGHTING - EGRESS LIGHTING
HORIZONTAL OR VERTICAL MOUNT**

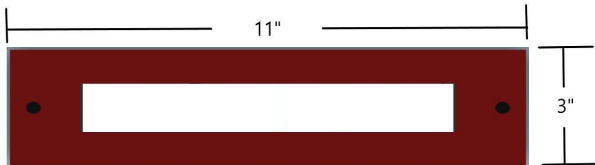

FEATURES

**CORROSION PROOF POLYMERIC ENCLOSURE
MULTIPLE TRIM OPTIONS
DIMMABLE
ETL LISTED WET LOCATION
61 MONTH WARRANTY**


UL1598/8750/1598C
SA C22.2#250.0C



Specifications

Light Source	High Brightness LED
LED Life	70,000 hour average
Input Voltage	120-277VAC
Power Consumption	7 to 10 Watts
Color Temperature	2700k,3000k,3500k,4000k
CRI	90 Typical
Lumen Output	150-600 Lumens (trim configuration dependent)
Lens	Aluminum Powdercoated
Material	Polymeric enclosure
Fasteners	Stainless Steel
Dimensions	11" x 3" x 5.25"
Weight	3lb.
Operating Temp	-31f to 122f
Listings	ETL Listed to UL Standard 2108, CSA C22.2 No. 9.0

Dimensions

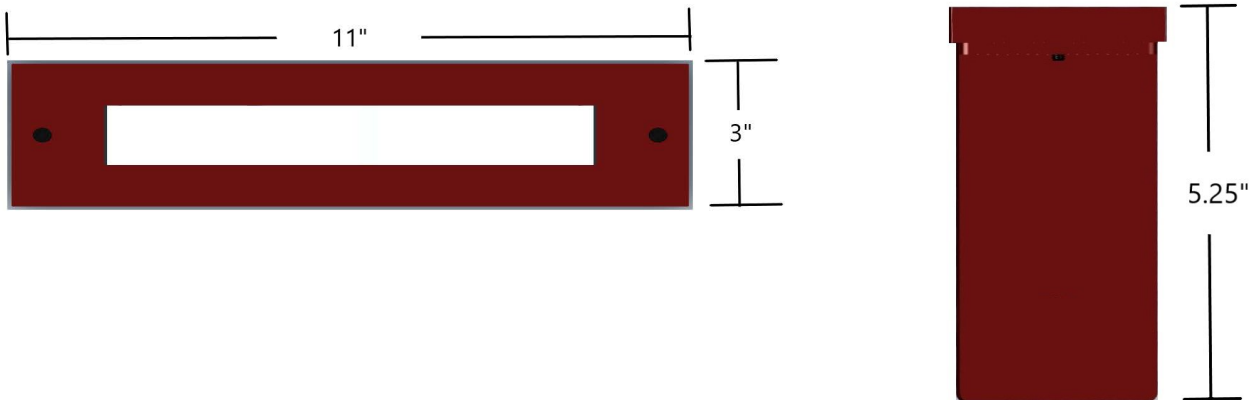

Ordering Guide

	COLOR TEMP	FACEPLATE	FINISH	INPUT VOLTAGE	WATTAGE	DIM	WALL CONDITION
SL200							
	2700K 3000K 3500K 4000K 5000K	A-HORZ B-HORZ C-HORZ/VERT D-VERT	BRONZE BLACK WHITE OTHER (RAL) NATURAL	120 VAC 277 VAC	7 W 10W	NONE 0-10 V OTHER	CONCRETE MASONRY