




FOR CONCRETE OR MASONRY INSTALLATIONS

SL200 APPLICATIONS

**STEP LIGHTING - PATH LIGHTING - EGRESS LIGHTING
HORIZONTAL OR VERTICAL MOUNT**

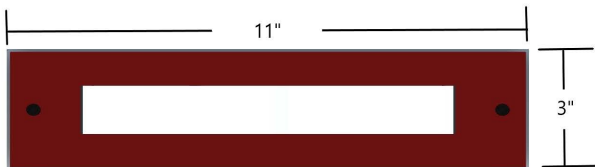



FEATURES

**CORROSION PROOF POLYMERIC ENCLOSURE
MULTIPLE TRIM OPTIONS
DIMMABLE
LISTED WET LOCATION
61 MONTH WARRANTY**

Specifications

Light Source	High Brightness LED
LED Life	70,000 hour average
Input Voltage	120-277VAC
Power Consumption	7 to 10 Watts
Color Temperature	2700k,3000k,3500k,4000k
CRI	90 Typical
Lumen Output	150-600 Lumens (trim configuration dependent)
Lens	Aluminum Powdercoated
Material	Polymeric enclosure
Fasteners	Stainless Steel
Dimensions	11" x 3" x 5.25"
Weight	3lb.
Operating Temp	-31f to 122f

Dimensions

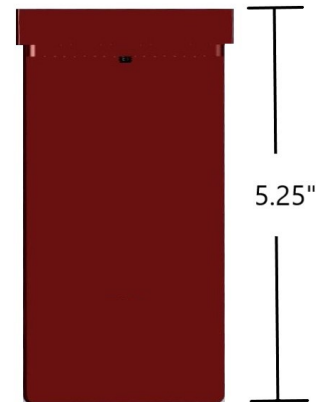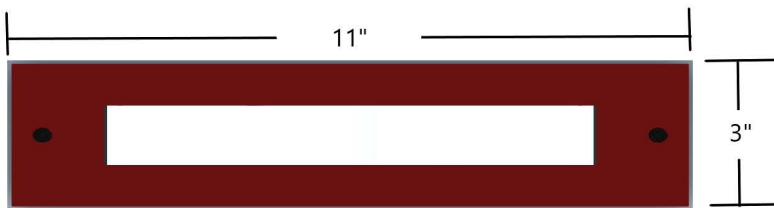

Ordering Guide

	COLOR TEMP	FACEPLATE	FINISH	INPUT VOLTAGE	WATTAGE	DIM	WALL CONDITION
SL200							
	2700K 3000K 3500K 4000K 5000K	A-HORZ B-HORZ C-HORZ/VERT D-VERT	BRONZE BLACK WHITE OTHER (RAL) NATURAL	120 VAC 277 VAC	7 W 10W	NONE 0-10 V OTHER	CONCRETE MASONRY