

RIGID LED ARRAY

APPLICATIONS:


**Exterior
Wall Wash
Toe Kick
Under Counter
Handrails**

**Dimmable
120 Degree
Mounting Options**

Low Voltage

**ETL Listed Wet
Location**

61 Month Warranty

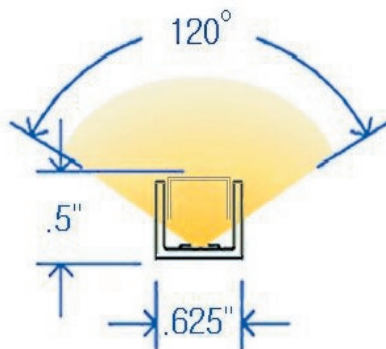

The RLX500 is linear LED lighting in a rigid, lowprofile, aluminum extrusion. It is encased in optically clear silicone for complete weather protection.

Available in custom Lengths from 6 inches to 8 feet.


Low to No maintenance LED fixture.

Specifications

Light Source	High-brightness LED (275 lumens per ft @ 3000k)
LED Life (L70)	50,000 hours average*
Input Voltage	24 VDC
Power Consumption	4Watts per ft
Color Temperature	2700k, 3000k, 3500k or 4000k
CRI	90 Typical
Beam	120 Degrees
Material	6061-T6 Aluminum
Fasteners	Stainless steel hardware
Standard Mounting	3 bracket options or 3m 2 side tape
Operating Temperature	-31F to 122F (-35C to 50C)
Listings	ETL listed to UL Standard 8750 CSA C22.2 No. 250.10



*LED life is defined as the time to 70% lumen maintenance (L70)

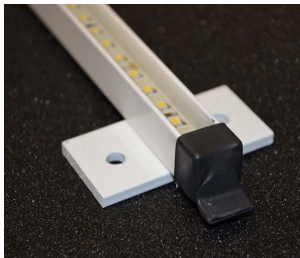

A



B



C

Ordering Guide

COLOR TEMP	INSTALL BRACKET	FINISH	INPUT VOLTAGE	WATTAGE	LENGTH
RLX500			24 VDC	4W PER FT	
2700K 3000K 3500K 4000K 5000K	NONE/TAPE A B C	BRONZE BLACK WHITE OTHER (RAL) NATURAL			6" TO 96" (2" INCREMENTS)