

RIGID LED ARRAY

**APPLICATION:
Exterior Wall Wash
with Glare Shield**



Dimmable

90 Degree Cutoff

Low Voltage

**ETL Listed
Wet Location**

**120 Month
Limited Warranty**

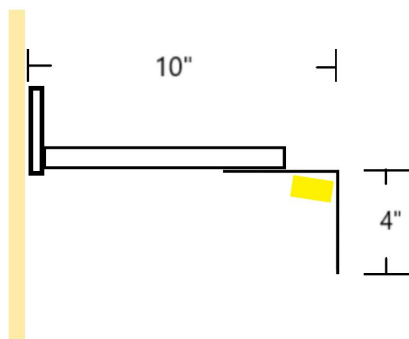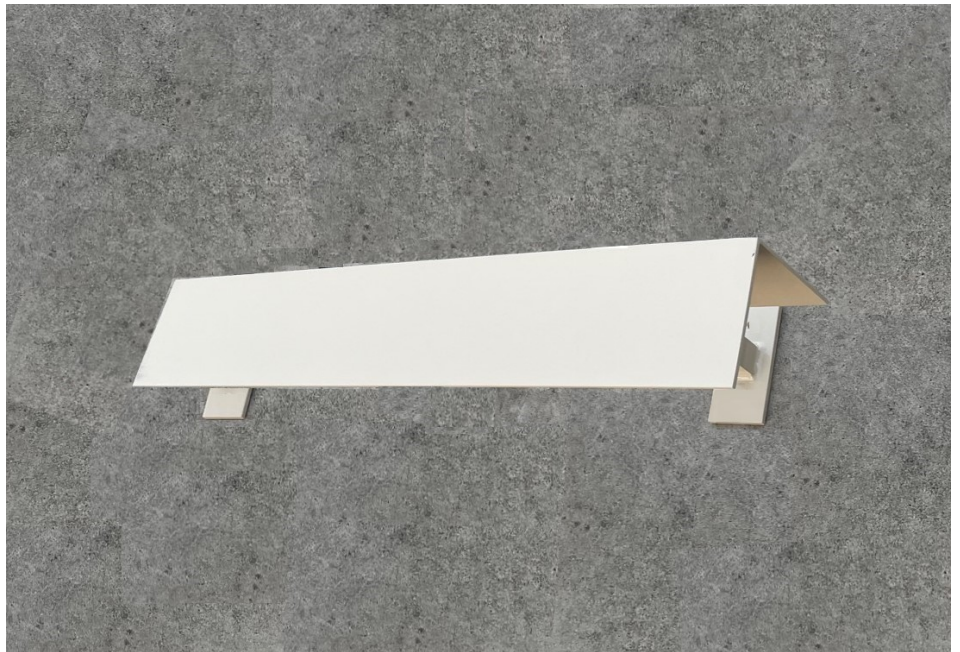

The RLX500-4S5 is a linear LED fixture with a 4" angle glare shield designed specifically for wall washing applications.

Available lengths are 2, 4 and 6 ft. (8 ft by special order)

Specifications

Light Source	High-brightness LED (575 lumens per ft @ 3000k)
LED Life (L70)	50,000 hours average*
Input Voltage	24 VDC
Power Consumption	5 Watts per ft
Color Temperature	2700k, 3000k, 3500k, 4000k, 5000K
CRI	90 Typical
Beam	120 Degrees
Material	6061-T6 Aluminum
Fasteners	Stainless steel hardware
Standard Mounting	Wall Mount
Operating Temperature	-31F to 122F (-35C to 50C)
Listings	ETL listed to UL Standard 8750 CSA C22.2 No. 250.10



*LED life is defined as the time to 70% lumen maintenance (L70)



Ordering Guide

	COLOR TEMP	BRACKET LENGTH	FINISH	INPUT VOLTAGE	LENGTH	JUNCTION BOX
RLX500-4S5				24 VDC		
	2700K 3000K 3500K 4000K 5000K	STANDARD CUSTOM	BRONZE BLACK WHITE OTHER (RAL)		24" 48" 72" CUSTOM	NONE 8 X 6 X 4 8 X 8 X 4