

LED Path & Area Light


**Designed for Outdoor
Lighting Applications**

**Industry-Leading
Durability**

Low Maintenance

Low Voltage

61 Month Warranty

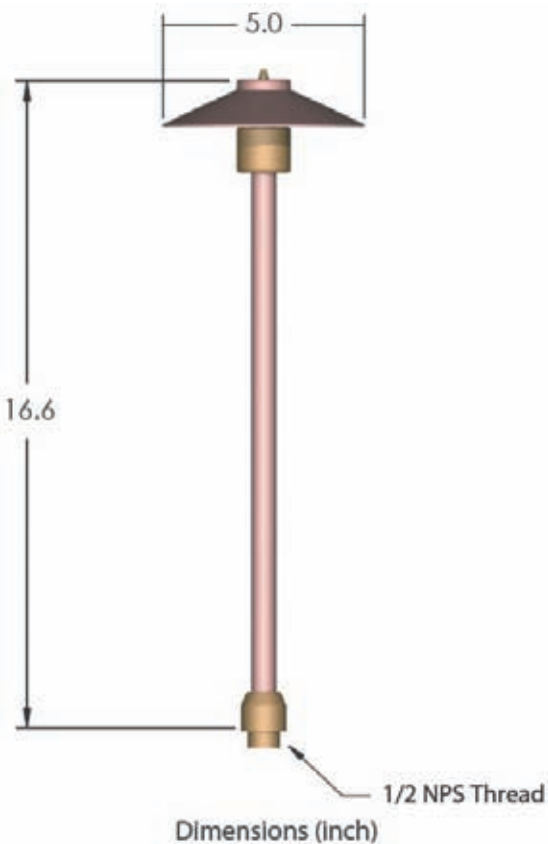

Description

The PA-100 is a low energy LED path light. Superior long lasting LED technology delivers reliable low maintenance lighting service.

Engineered specifically for today's LED technology, the PA-100 fixture design provides critical thermal transfer. Excellent heat removal ensures the high performance and reliability of its LED light source.


Other features include patent pending socket, anti-wicking power lead and service upgrade capability.

Patent pending socket design significantly reduces relamping time and cost.



PA-100 PATH/AREA LIGHT

Specifications

Light Source	High-brightness LED (light emitting diode)
LED Life (L70)	50,000 hours average*
Input Voltage	7 to 15 Vac/Vdc
Power Consumption	3.7 Watts
Color Temperature	3000k to 4000k
CRI	80 Typical
Optic	Clear Acrylic, Impact and UV resistant
Material	6061-T6 Aluminum, Brass and Copper
Fasteners	316L Stainless steel hardware
Standard Mounting	PVC Post and ABS Cap
Operating Temperature	-31F to 122F (-35C to 50C)
Certification	UL1838 

*LED life is defined as the time to 70% lumen maintenance (L70)

Applications



Ordering Guide

PREFIX	MATERIAL	LED COLOR	FINISH
PA-100	<input type="text"/>	<input type="text"/>	<input type="text"/>
	[AL] Aluminum [SM] Brass [CU] Copper	[WW] 3000k [CW] 4000k	[N] Natural (Brass & Copper) [BK] Black [WT] White [BN] Brown [GR] Green [C] Custom

 **THE LED COMPANY**
160 McCormick Ave, Costa Mesa, CA 92626

Phone: 949.645.2242
Fax: 949.548.4926
Email: sales@ledcohome.com
Web: www.ledcohome.com

Manufactured in the USA

